

Technical data

Housing	Beech Plywood
Finishing	Linseed oil varnish
Hopper capacity	350 g (Wheat)
Dimensions H x W x D	275 x 145 x 280 mm (5.12 x 10.6 x 11.8 inches)
Height allowance for bowls	95 mm (3.7 inches)
Grind capacity El Flocko	approx. 50 g/min
El Flocko Grande	approx. 90 g/min
Rollers	Stainless steel rollers
Weight	5,0 kg
Motor output	120 Watt/230 Volt ~ 50 Hz
Guarantee	10 years*

At the end of its lifecycle, this product must be turned in at a collection point for recycling electric and electronic appliances. The materials can be reused as labelled. Please contact your community or city administration for the respective collection point



*2 years when used commercially

hawos Hotline

If you have questions about your mill, please give us a call or write us an e-mail, our customer service team is happy to assist you:

0 61 72 / 67 17 49
info@hawos.de
www.hawos.de




hawos.

hawos kornmühlen GmbH
Ober-Eschbacher Straße 37
D - 61352 Bad Homburg v. d. H.
Telefon 0 61 72 / 40 12 00
Fax 0 61 72 / 40 12 019
eMail info@hawos.de
Internet www.hawos.de

Operating Instructions

hawos El Flocko

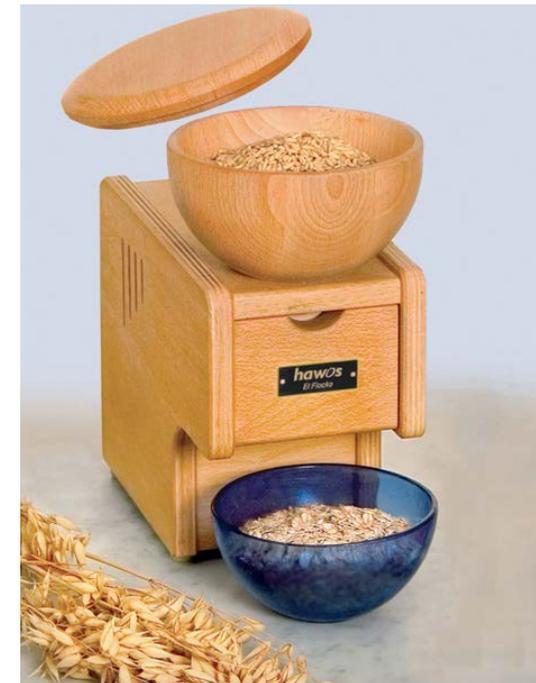

hawos.

Congratulations to your new hawos El Flocko.

Dear hawos customer,

We are delighted you have chosen the hawos El Flocko!

Please carefully read through these operating instructions to familiarise yourself with your hawos. It will reward you with reliability and convenience.

El Flocko is designed for private household use. To get the greatest nutritional benefits from your cereal it is advised to only use freshly flaked grain and not to stock up, as nutrients get lost over time.

Initial Start-up:

Use El Flocko only with 230V power outlet.

Fill the grains into the hopper.

Place a bowl under the flour outlet and switch on the flaker.

After use, switch off the flaker.

The universal-squeezers can be used to flake all types of grain. Please note: only hullless oat can be flaked without priming. All other types of grains have to soak before being flaked.

- > ATTENTION: Safety is paramount!
- > Only connect your mill to a properly installed socket with grounding contact.
- > Do not use defective units.
- > If the mains cord is damaged, only the manufacturer, its customer service department or a qualified professional may replace it.
- > Only authorised hawos professionals may perform repairs.
- > Never operate your mill unattended!
- > Never reach into the funnel or flour outlet when the unit is operating – risk of injury!
- > Before opening the housing, be absolutely sure to pull the mains plug to prevent the unit from accidentally activating – risk of injury!
- > This device is not intended for use by persons (including children) with impaired physical, sensory or mental abilities or who lack experience and/or knowledge unless they are supervised by a person responsible for their safety or have been instructed by such a person in how to use the device. Children must be under supervision to ensure that they do not play with the device.
- > Never immerse the device in water.

hawos assumes no liability for cases of improper use.

Cleaning:

The rollers can be easily taken out for cleaning. To do so, push the cover downwards and then pull the squeezers straight towards you.

Beware the position of the hexagonal shaft that drives the rollers when reinserting the squeezers.

Hint:

If the hexagonal shaft does not fit when reinserting, insert the squeezers onto the guiding pin, switch on the El Flocko and gently push the squeezers inwards so that it snaps back into place. Then push the cover upwards back into position.

Fault:

The integrated motor protection switches off the motor in case of overheating. If this happens, pull the mains plug and let the device cool down for a couple of minutes. When power is restored, the device will be operational again.

This Reset-function only works when you pull the mains plug and no electricity flows to the device!

Setting the thickness of the flakes:

To change the pressure of the rollers, first take off the cover at the front of the El Flocko and take out the squeezers. The two Allen screws on the side of the squeezers set the pressure. For finer flakes, turn the screws clockwise, or turn them anti-clockwise (looser) for coarser flakes. The rollers should still be movable by hand!

Hint:

1. For fresh Müsliflakes in the morning, soak the grain for approximately 30 minutes in water the night before and then spread them out on a kitchen towel over night so that they can further upwell.

2. To identify whether the grain has the right moistness do the spoon-test: Place one grain on a hard surface and squeeze it flat with the spoon. If the grain crumbles apart, then the grain is too dry!

The hawos-Team wishes you all the best with your hawos El Flocko!

